

## Technical Specifications



**ROOF**  
 Basic: Diagonal bars as standard. Single roof (height 40 mm) available as option.  
 Panoramic: Single skin roof (height 40 mm) as standard. Inclined roof (max. height 60 mm) available as option.

**SHAFT**  
 Comprises of EN 10142 compliant Fand P02 GZ275 MC CO cold bent galvanized profiles. Epoxy polyester powder paint finish. RAL9016 (Traffic White) painted.  
 Outdoor package: RAL 9016 (Traffic White) painted polyester finish.

**GUIDES**  
 T70 profile. Nylon sliding blocks and wheels for the movement of the arcade.

**DOORS**  
 Made in coated steel sheeting painted in RAL9016 (Traffic White).  
 Basic: With a small window.  
 Panoramic: With a panoramic window.  
 Outdoor package: Made in galvanized steel.

**TRAVEL**  
 Min. travel 1520 mm. Max. travel 8520 mm.

**SPEED**  
 0.15 m/s

**CAR LAYOUT**  
 Control panel with display, braille control buttons, integrated plastic handrail and telephone unit.  
 Basic: Central stave in F12PPS Skinplate, lateral stave in A4 (Milk) Skinplate and floor in Dark Sand (PGF).  
 Panoramic: Protection wall with ceiling, central stave in F12PPS Skinplate, lateral stave in A4 (Milk) Skinplate and floor in Dark Sand (PGF).

**RATED LOAD**  
 400 kg

**CABINET FOR ELECTRICAL PANEL AND HYDRAULIC UNIT (option)**  
 Made in steel (protection rating IP55), with integrated emergency backup battery and transformer.  
 Max. distance between shaft and cabinet 5 m), max. dimensions: width 900 mm, height 1500 mm, depth 480 mm.

**ELECTRICITY SUPPLY**  
 230 ± 10% V, 50 Hz single-phase, with earthing conductor.  
 Maximum current consumption 11-13 A (based on the specific system specifications). Maximum stand-by power consumption 5 W.

**MOTOR PUMP**  
 Single-phase 230 V, 50 Hz; 1.8 – 2.2 kW.




## Configuration


- 2 Stops / 2 doors / 3000 mm travel as starting configuration - additional metres of travel available up to 8520 mm
- 3 Stops / 3 doors / 5500 mm travel as starting configuration - additional metres of travel available up to 8520 mm

# PR4S- Vertical Platform Lift


Small

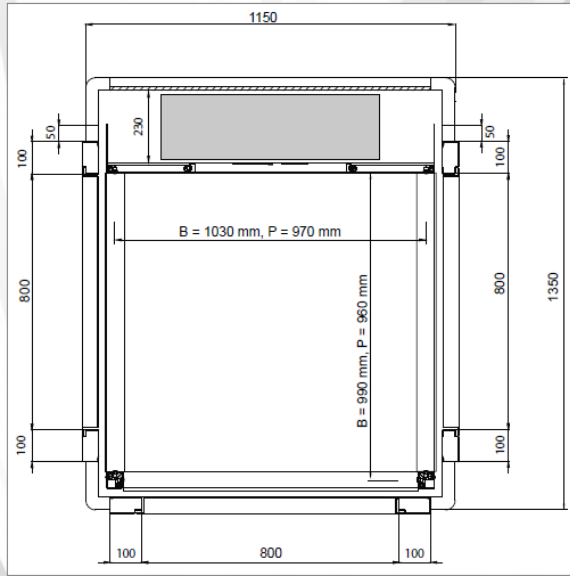


Medium

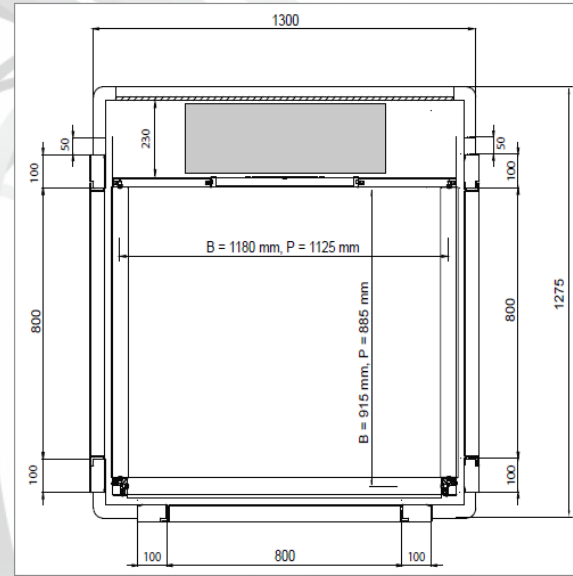

Large

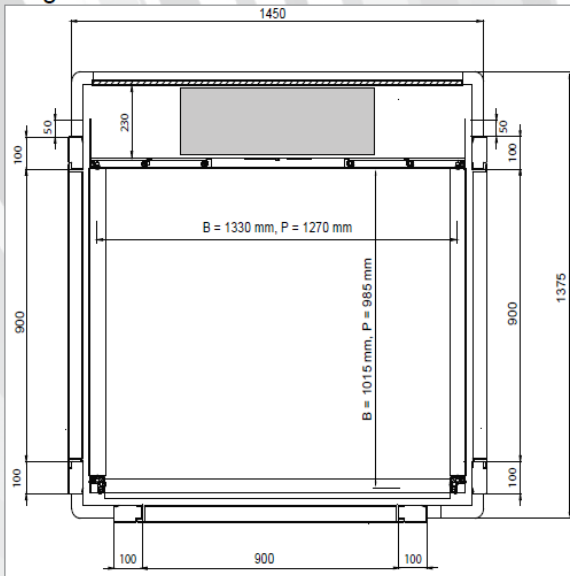

Extra Large

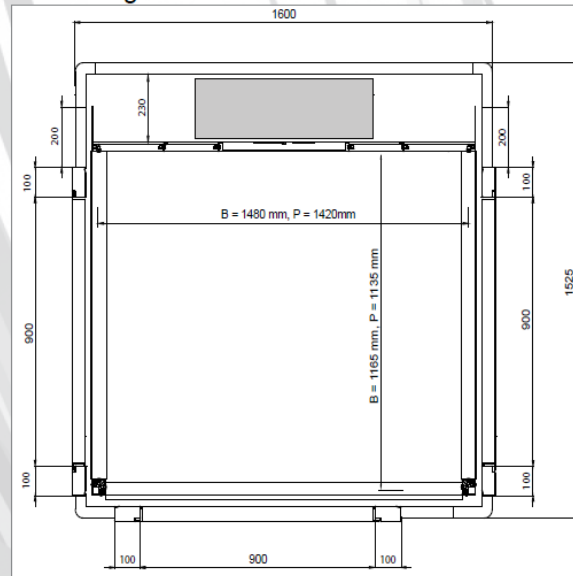

Available with solid panels in the shaft, or glazed to all four sides for a Panoramic view

Internally available with panels, internal or external installations available with glass

Ready made drawings for your approval

Fast turnaround of quotations

Standard stock parts, for quick turn around of orders

Separate machine cabinet for near silent running

High volume product means low prices for you

Manual or automatic opening landing doors available

Fully compliant with Machinery Directive 2006/42/EC, with CE and TUV marking

Fulfils the requirements of DDA regulations and the Building Regulations Part M

B = Basic  
P = Panoramic

# Panova

PANOVA LIFTS LIMITED  
UNIT 2 SIDINGS BUSINESS PARK  
FREIGHTLINER ROAD  
HULL HU3 4XA  
TEL: 01482 480710

mail@panova.biz